


REVISION	CHANGE	DATE

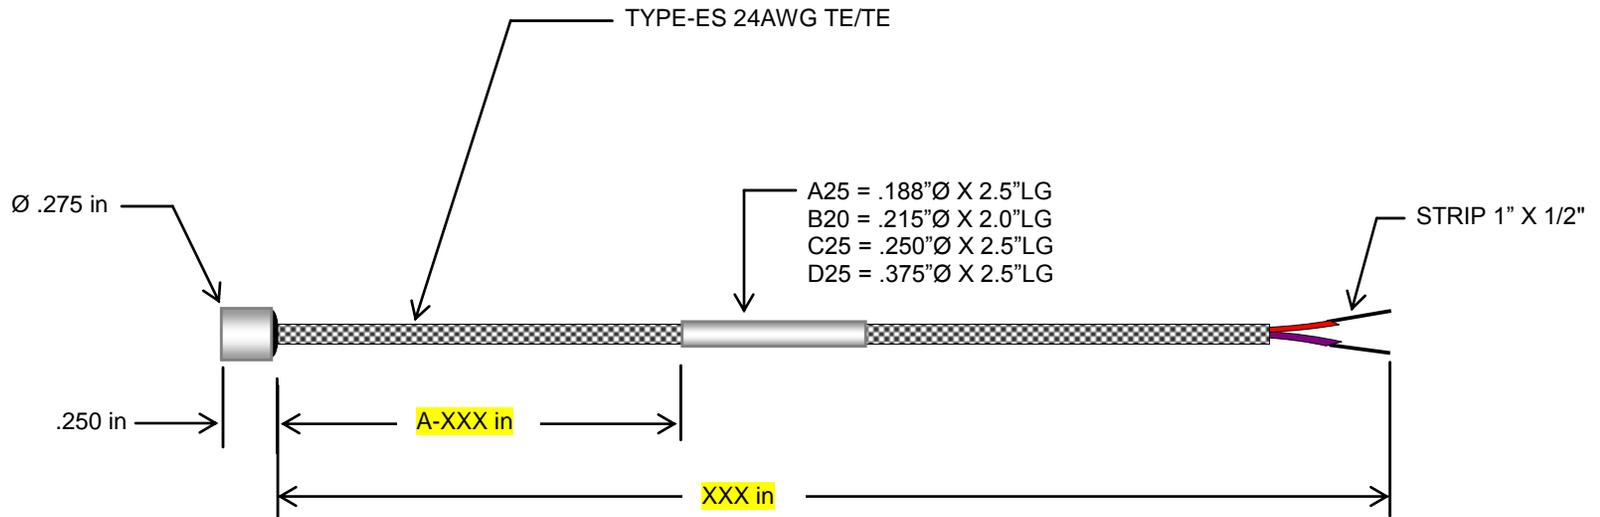

Approved by: _____ Ref: _____

Specifications

ELEMENT: TYPE-T (COPPER/CONSTANTAN) Special limits of error

CONFIG: Single

TEMP RANGE: -180 to 260°C (-300 to 500°F)

*-200 to 0°C 0.5°C or ± 0.8% (whichever is greater)

CASE: 300 series Stainless Steel.

LEADS: Teflon jacket/Insulation/SSOB. (Teflon 0-500°F)

TIME CONSTANT RANGE: Typical value in moving water.

- Grounded Junction: 0.3 Seconds
- Ungrounded Junction: 1-6 Seconds

INSULATION RESISTANCE: 10megaOhms min. at 100VDC, leads to case, ungrounded junctions only.

18714 PARTHENIA STREET - NORTHRIDGE - CALIFORNIA 91324 - USA PHONE: (818) 886-3755 - FAX: (818) 772-7690	
PRODUCTION CODE: SS-275-S-K-G-.25-L3-XX-SSXX-BW-0	
PART NO. TXXX-000000XX	OCR # XXXXX
DESCRIPTION: FEEDTHRU BEARING TC	
DATE: XX/XX/XX	REV: NC